

PF7400,7500 & 7600 SERIES

STRAIGHT ROUND STEEL

FEATURES

STRAIGHT STEEL ROUND TUBE SHAFT
SLOTTED BCD ASSISTS IN FIELD RETROFITS
BASE COVER OR NUT COVERS INCLUDED
REINFORCED HAND HOLE FRAME STANDARD

POWDERCOAT STANDARD COLOUR FINISH
MEETS AASHTO & CSA S6-06 STANDARDS
2 DRILLINGS WITH CAP OR TENON STANDARD
INCLUDES J-ANCHOR BOLTS

ORDERING INFORMATION

Example PF 74 20 S AX DB

POLEFAB PART# _____
SERIES _____
POLE HEIGHT _____
WALL THICKNESS _____
FIXTURE MOUNT _____
FINISH _____




ROUND TUBE POLES



| POLEFAB | SHAFT SIZE | HEIGHT | WALL TYPE | MOUNT TYPE | FINISH | CATALOG NUM. | FT | M | SHAFT WALL | BCD | BPL | A/B'S | PROJ | WT(LBS) | loadings(PA) | | | | |
|---------------------------------|------------|--------|-----------|------------|--------|--------------|-----------|----|------------|------|------|-------|------|---------|--------------|-----|-----|-----|-----|
| | | | | | | | | | | | | | | | 400 | 500 | 600 | 700 | 800 |
| PF 74 12 S XX XX PF-7412-S-XXXX | 12 | 3.8 | 4 | 0.125 | 8 | 19 | 3/4"X24" | 4" | 79 | 1.22 | 0.93 | 0.74 | 0.60 | 0.50 | | | | | |
| PF 74 15 S XX XX PF-7415-S-XXXX | 15 | 4.7 | 4 | 0.125 | 8 | 19 | 3/4"X24" | 4" | 96 | 0.87 | 0.64 | 0.49 | 0.38 | 0.30 | | | | | |
| PF 74 18 S XX XX PF-7418-S-XXXX | 18 | 5.7 | 4 | 0.125 | 8 | 19 | 3/4"X24" | 4" | 112 | 0.62 | 0.43 | 0.31 | 0.22 | 0.15 | | | | | |
| PF 74 20 S XX XX PF-7420-S-XXXX | 20 | 6.3 | 4 | 0.125 | 8 | 19 | 3/4"X24" | 4" | 123 | 0.49 | 0.32 | 0.20 | 0.12 | 0.06 | | | | | |
| PF 74 24 S XX XX PF-7424-S-XXXX | 24 | 7.5 | 4 | 0.125 | 8 | 19 | 3/4"X24" | 4" | 145 | 0.27 | 0.13 | 0.03 | XX | XX | | | | | |
| PF 74 20 H XX XX PF-7420-H-XXXX | 20 | 6.3 | 4 | 0.188 | 8 | 19 | 3/4"X24" | 4" | 178 | 0.87 | 0.63 | 0.46 | 0.35 | 0.26 | | | | | |
| PF 74 24 H XX XX PF-7424-H-XXXX | 24 | 7.5 | 4 | 0.188 | 8 | 19 | 3/4"X24" | 4" | 211 | 0.58 | 0.38 | 0.25 | 0.15 | 0.08 | | | | | |
| PF 75 15 S XX XX PF-7515-S-XXXX | 15 | 4.7 | 5 | 0.125 | 8.5 | 19 | 3/4"X24" | 4" | 118 | 1.47 | 1.11 | 0.87 | 0.70 | 0.57 | | | | | |
| PF 75 18 S XX XX PF-7518-S-XXXX | 18 | 5.7 | 5 | 0.125 | 8.5 | 19 | 3/4"X24" | 4" | 139 | 1.10 | 0.80 | 0.60 | 0.45 | 0.35 | | | | | |
| PF 75 20 S XX XX PF-7520-S-XXXX | 20 | 6.3 | 5 | 0.125 | 8.5 | 19 | 3/4"X24" | 4" | 152 | 0.90 | 0.63 | 0.45 | 0.32 | 0.22 | | | | | |
| PF 75 24 S XX XX PF-7524-S-XXXX | 24 | 7.5 | 5 | 0.125 | 8.5 | 25 | 1"X30" | 4" | 185 | 0.58 | 0.35 | 0.20 | 0.10 | 0.02 | | | | | |
| PF 75 20 H XX XX PF-7520-H-XXXX | 20 | 6.3 | 5 | 0.188 | 8.5 | 25 | 1"X30" | 4" | 226 | 1.52 | 1.13 | 0.76 | 0.68 | 0.54 | | | | | |
| PF 75 24 H XX XX PF-7524-H-XXXX | 24 | 7.5 | 5 | 0.188 | 8.5 | 25 | 1"X30" | 4" | 267 | 1.09 | 0.77 | 0.55 | 0.39 | 0.28 | | | | | |
| PF 75 30 H XX XX PF-7530-H-XXXX | 30 | 9.4 | 5 | 0.188 | 8.5 | 25 | 1"X30" | 4" | 329 | 0.61 | 0.36 | 0.18 | 0.06 | XX | | | | | |
| PF 76 30 S XX XX PF-7630-S-XXXX | 30 | 9.4 | 6 | 0.125 | 10.5 | 25 | 1"X30" | 4" | 277 | 1.09 | 0.71 | 0.46 | 0.27 | 0.14 | | | | | |
| PF 76 35 S XX XX PF-7635-S-XXXX | 35 | 11.0 | 6 | 0.125 | 10.5 | 25 | 1"X30" | 4" | 318 | 0.66 | 0.34 | 0.12 | XX | XX | | | | | |
| PF 76 40 S XX XX PF-7640-S-XXXX | 40 | 12.6 | 6 | 0.125 | 10.5 | 25 | 1"X30" | 4" | 359 | 0.28 | 0.01 | XX | XX | XX | | | | | |
| PF 76 30 H XX XX PF-7630-H-XXXX | 30 | 9.4 | 6 | 0.188 | 10.5 | 32 | 1.25"X48" | 5" | 410 | 1.67 | 1.18 | 0.85 | 0.61 | 0.43 | | | | | |
| PF 76 35 H XX XX PF-7635-H-XXXX | 35 | 11.0 | 6 | 0.188 | 10.5 | 32 | 1.25"X48" | 5" | 472 | 1.18 | 0.75 | 0.46 | 0.26 | 0.10 | | | | | |
| PF 76 40 H XX XX PF-7640-H-XXXX | 40 | 12.6 | 6 | 0.188 | 10.5 | 32 | 1.25"X48" | 5" | 533 | 0.64 | 0.34 | 0.10 | XX | XX | | | | | |

NOTES:
BCD SHOWN IS +/- 1/2" SLOTS
ANCHOR BOLT HOLES ARE BOLT DIA +1/4"
BASE COVER MAY BE PLASTIC OR STEEL
DEPENDING ON FINISH SELECTED
CUSTOM HEIGHTS AVAILABLE
CUSTOM COLOURS REQUIRE STEEL BASE COVER
ANCHORS ARE GALVANIZED WITH 2 NUTS & 2 WASHERS
CONTACT THE FACTORY FOR CUSTOM APPLICATIONS
ALL POLES MAY BE SUPPLIED DIRECT BURIED

PROJECT: _____
CUSTOMER: _____
JOB#: _____
COLOUR: _____
QTY: _____
NOTES: _____

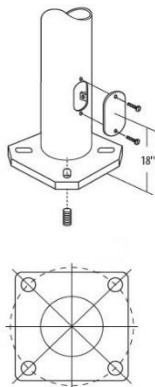

AVAILABLE FIXTURE MOUNTS

| | |
|----|---------------------|
| AX | DRILL 1 SIDE |
| BX | DRILL 2 SIZES @90 |
| CX | DRILL 2 SIDES @ 180 |
| DX | DRILL 3 SIDES |
| FX | DRILL 4 SIDES |
| TA | 2 3/8" OD TENON |
| TB | 2 7/8" OD TENON |
| TR | 3"OD TENON |
| CU | CUSTOM MOUNT |

AVAILABLE FINISHES

| | |
|------|------------------------------------|
| DB | BRONZE |
| BL | BLACK |
| WH | WHITE |
| GR | GREY |
| PS | PLATINUM SILVER |
| GN | GREEN |
| CU | CUSTOM |
| GA | GALVANIZED |
| GLXY | GALAXY - GALVANIZED & POWDERCOATED |

PF7400,7500 & 7600 SERIES